



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

FOREIGN REFERENCE

CA 2296024 A1 2001/07/12

(21) 2 296 024

(12) DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION

(13) A1

(22) Date de dépôt/Filing Date: 2000/01/12

(41) Mise à la disp. pub./Open to Public Insp.: 2001/07/12

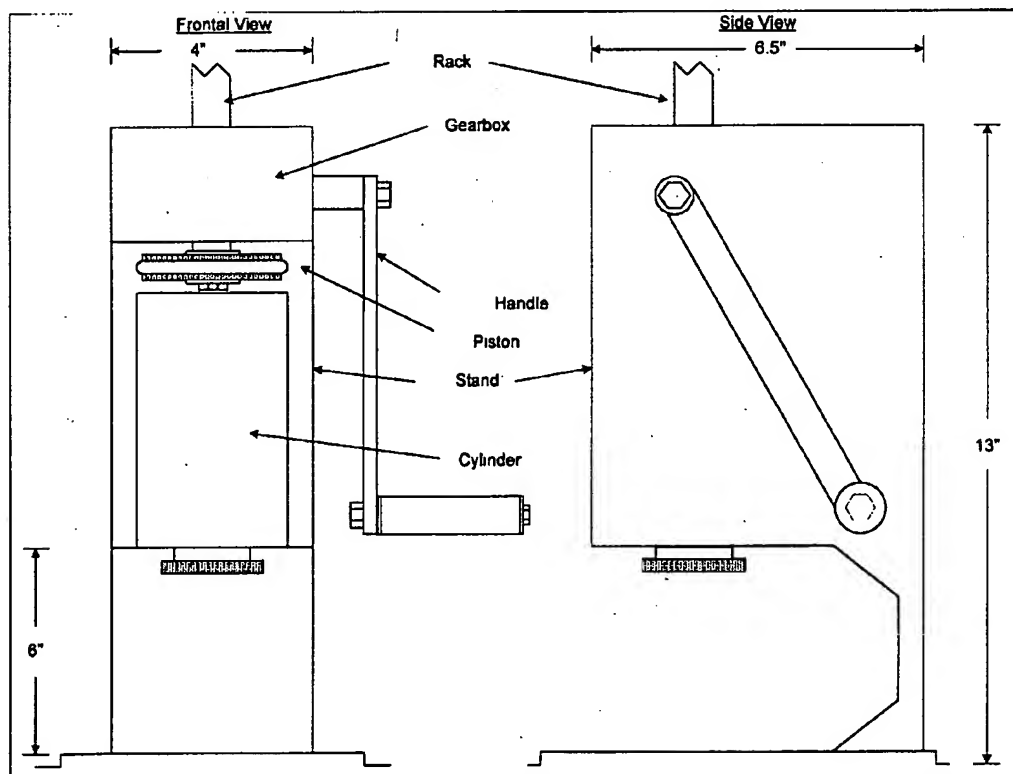
(51) Cl.Int.⁷/Int.Cl.⁷ A23P 1/12, A23L 1/10, A21C 1/00

(71) Demandeur/Applicant:
SELVADURAI, SRIMOHANARAJAH, CA

(72) Inventeur/Inventor:
SELVADURAI, SRIMOHANARAJAH, CA

(54) Titre : « STRING HOPPER »

(54) Title: STRING HOPPER



(57) Abrégé/Abstract:

A manually operated machine to make "String Hopper" (Sri lankan / East Indian food). Rack and pinion gear systems is used to drive piston. Piston presses the ingredient inside a cylinder. Other side of the cylinder has small holes. "String Hopper" comes out of these holes. Open area under the cylinder allows "String Hopper" tray to move freely to make "String Hopped".

Canada

<http://opic.gc.ca> · Ottawa-Hull K1A 0C9 · <http://cipo.gc.ca>

OPIC · CIPQ 191

4/19/06, EAST Version: 2.0.3.0

OPIC



CIPO

Abstract

A manually operated machine to make "String Hopper" (Sri lankan / East Indian food). Rack and pinion gear systems is used to drive piston. Piston presses the ingredient inside a cylinder. Other side of the cylinder has small holes. "String Hopper" comes out of these holes. Open area under the cylinder allows "String Hopper" tray to move freely to make "String Hopper".

Specifications

1 - This invention relates to a manually operated household device, used for the making of East Indian/Sri Lankan "String Hopper". String Hopper being a type of food consisting of dough created by steamed flour and or roasted rice flour.

2 - Other devices utilized to achieve the making of this type of food requires two handed operation using physical excursion to achieve what our machine makes relatively simple, through a rack and pinion set-up. Other devices require physical strength to press, where-as our invention utilizes handle leverage to achieve the same goal. Other devices are capable of creating 1-2 "String Hoppers" per application, which is extremely inefficient and time consuming, compared to my device which can create 25-200 String Hoppers per application.

3 - I have found that the disadvantages have been overcome by implementing a rack and pinion set-up to cut down on the amount of physical excursion used in the process. The disadvantage of the amount of String Hoppers made in one application is replaced by a more economical and less time consuming process with my invention.

4 - Drawings and description

- 1: Figure 1A - Frontal view of the "String hopper" Machine
Figure 1B - Side view of the "String hopper" Machine
Approximate specifications are indicated in the drawing.

Please note

The machine size may vary depending on the cylinder size
Gearbox and mechanism may vary depending on the cylinder size.

- 2: Figure 2A and Figure 2B shows how the cylinder slides into the suspended bracket in the Stand.
- 3: Figure 3 – The open area below the cylinder allows “String hopper” tray to move freely to make “string hopper”.
- 4: Figure 4A. And Figure 4B - The Cylinder's approximate specifications are indicated. These change slightly depending on the model.

Figure 4C – Piston.

- 5: Figure 5 – General function is explained briefly.
- 6: Figure 6- Type 1 Gear System.
- 7: Figure 7- Mechanics of Type 1 Gear System.
- 8: Figure 8- Type 2 Gear System.
- 9: Figure 9- Mechanics of Type 2 Gearbox.
- 10: Figure 10 - 3Dimensional view of previously used system.
- 11: Figure 11- Cross Section of previously used system.

5

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows.

A: A manually operated apparatus is used to make "String Hopper". A stainless steel cylinder, filled with ingredients, is placed in a suspended stand. A rack and pinion piston system, operated by a rotating lever, pushes the ingredients through a cylinder and a food shaping plate.

B: An open area below the food shaping plate allows for easy collection of the String Hopper.

C: Cylinder Suspending Mechanism is used in this machine.

D: Shape of the Cylinder is used in this machine.

D: Type 1 and Type 2 Gearboxes are used in this Machine.

E: Type 1 and Type 2 Gears systems are used in this Machine.

F: Shape of the Stand.

G: Shape of the Machine.


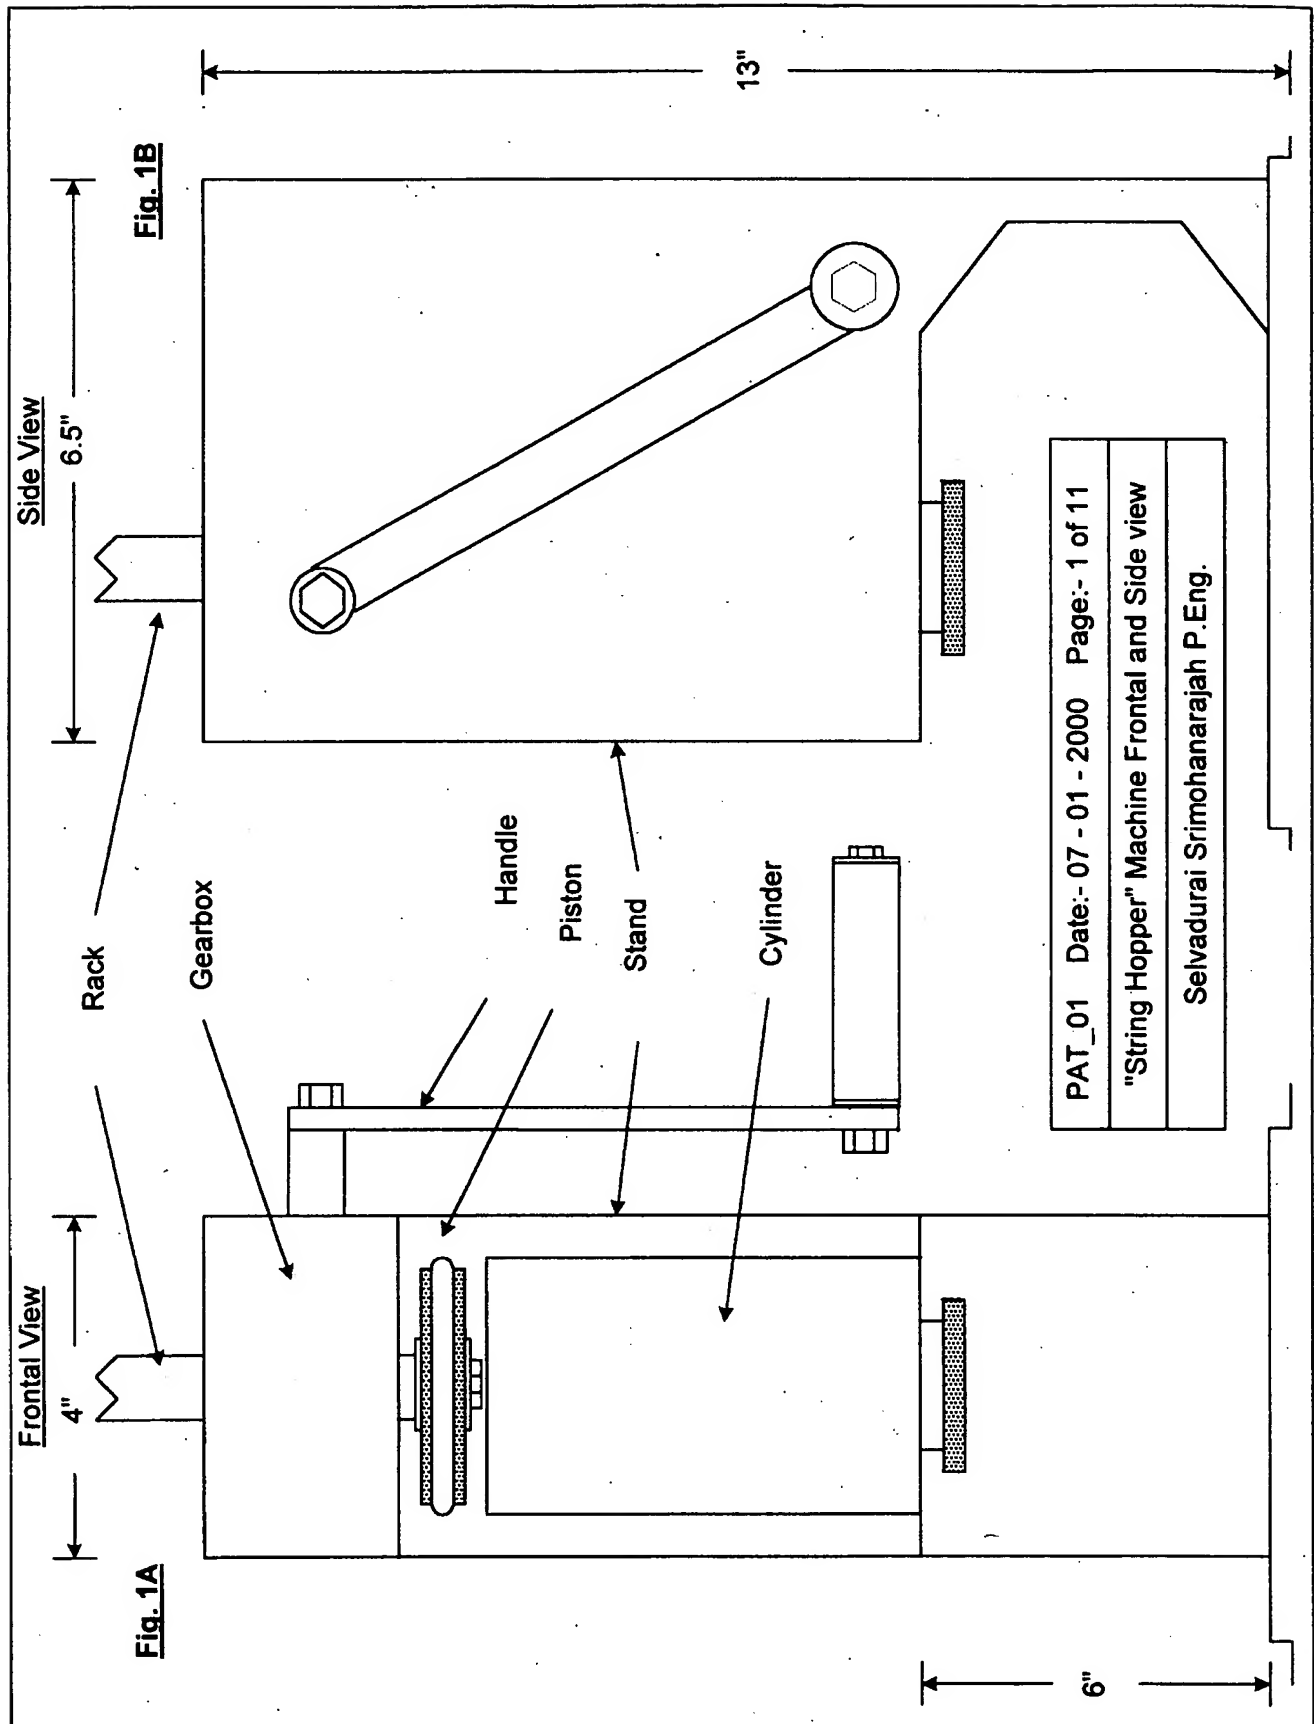
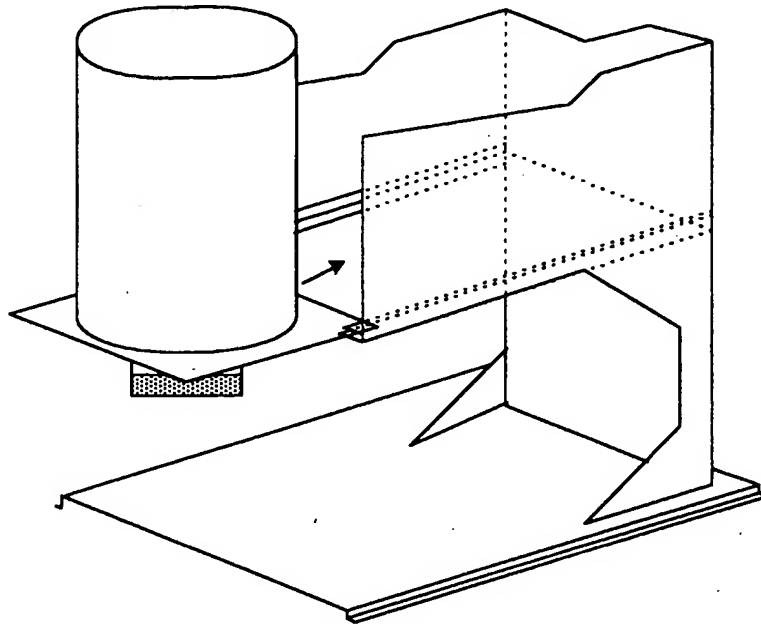


Fig. 2ACylinder slides into suspend bracket.**Fig. 2B**

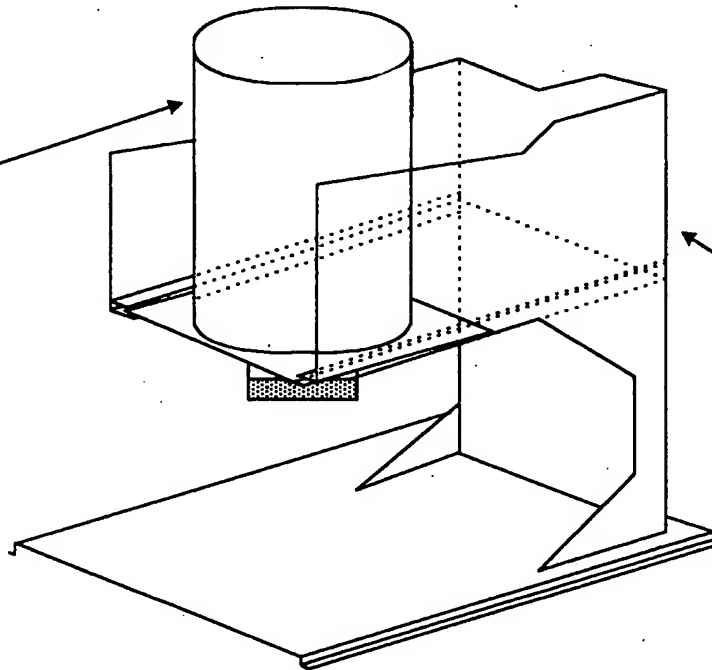Cylinder




Stand

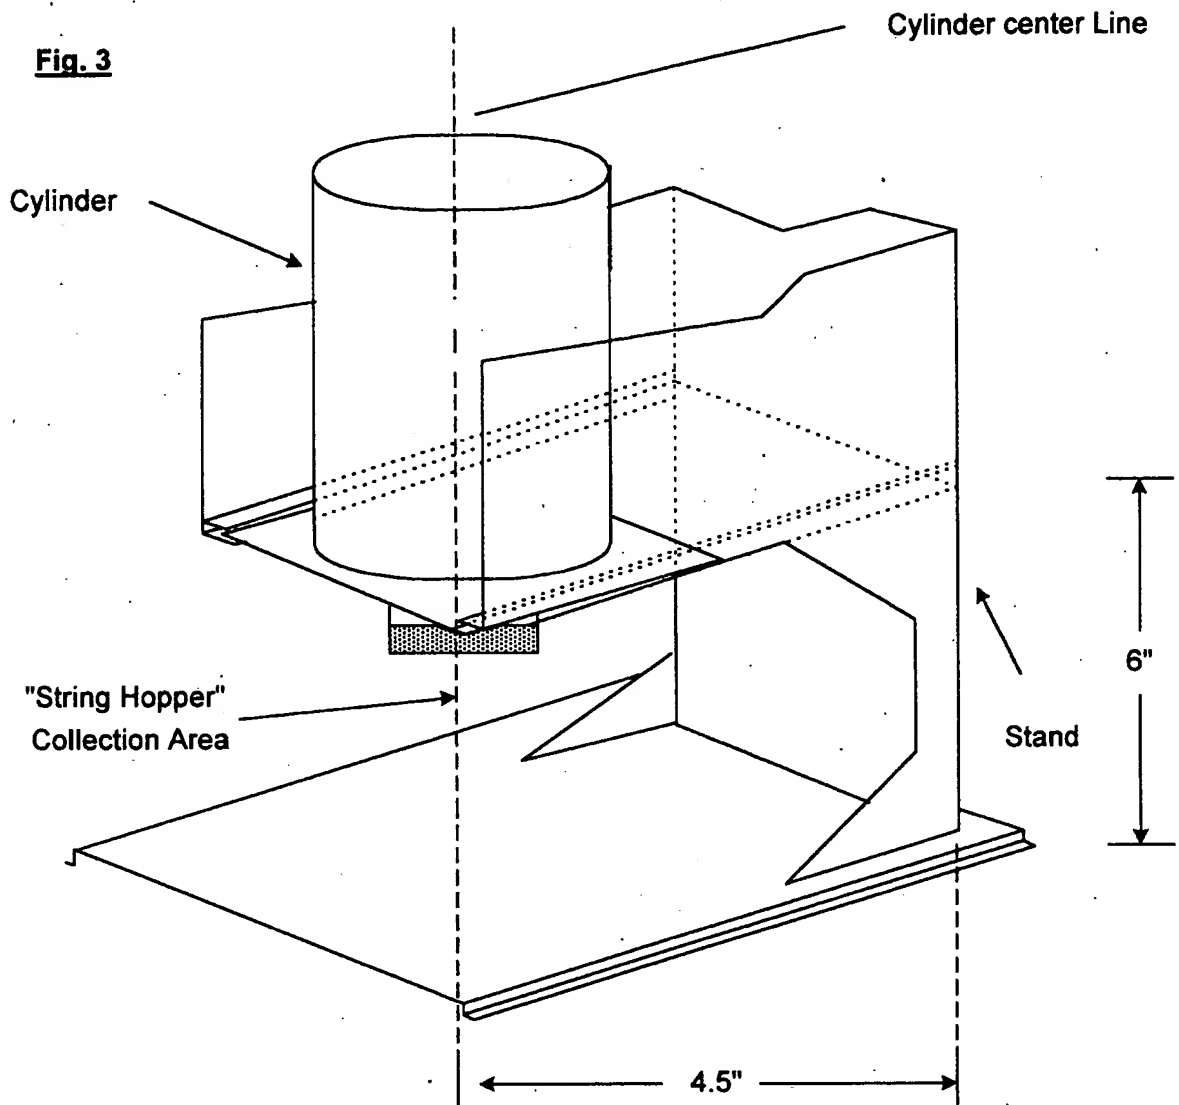PAT_02 Date:- 07 - 01 - 2000 Page:- 2 of 11

Cylinder Suspending Mechanism

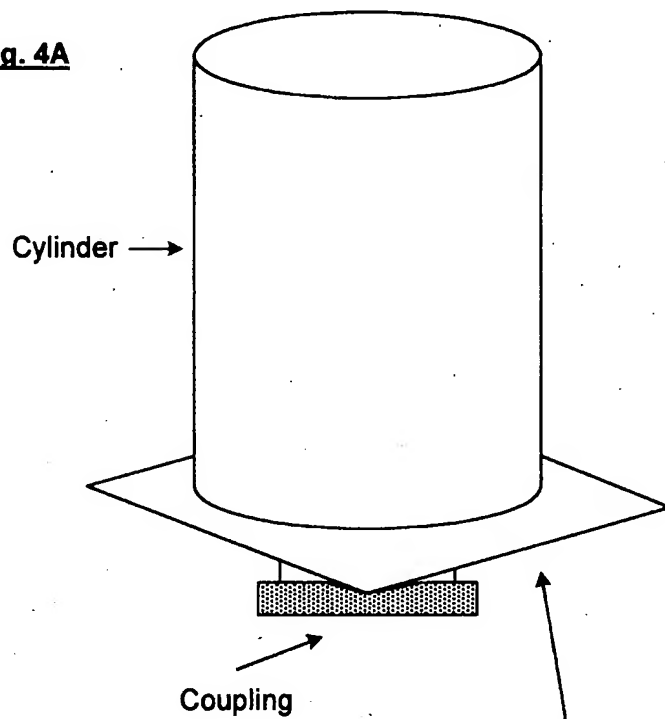
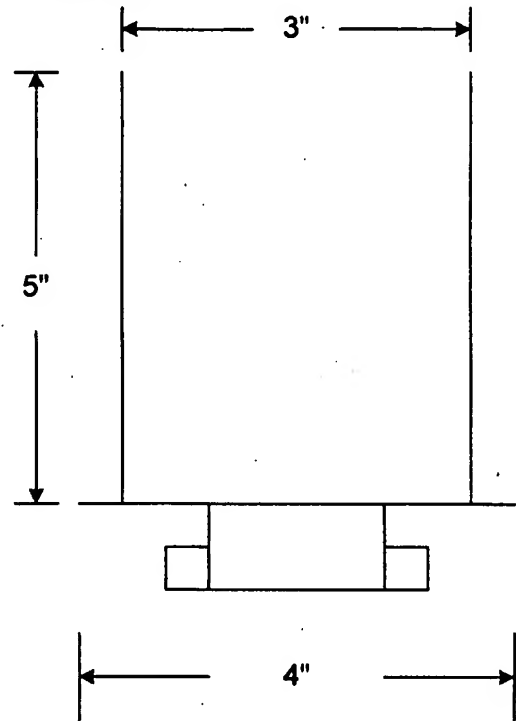
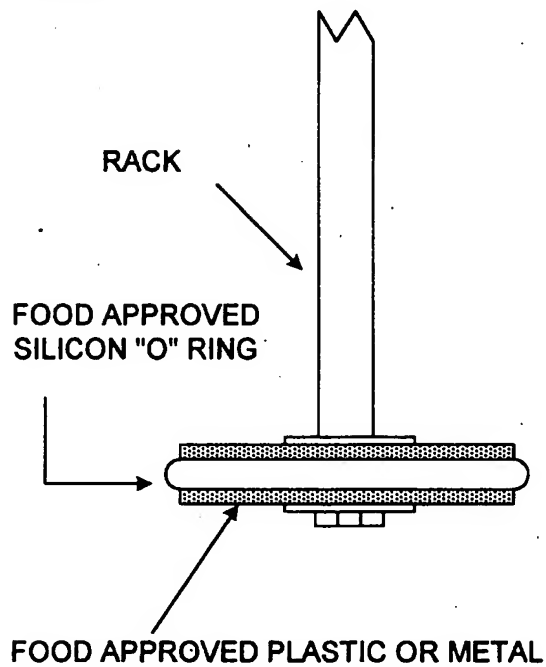
Selvadurai Srimohanarajah P.Eng.

Fig. 3

PAT_03 Date:- 07 - 01 - 2000 Page:- 3 of 11

Open "String Hopper" collection area

Selvadurai Srimohanarajah P.Eng.

CYLINDER**Fig. 4A****Fig. 4B****PISTON****Fig. 4C**

4" x 4" Plate

Please Note


Cylinder Specification can be changed slightly
for different models.

PAT_04 Date:- 07 - 01 - 2000 Page:- 4 of 11

Cylinder and Piston

Selvadurai Srimohanarajah P.Eng.

SYSTEM IN GENERAL

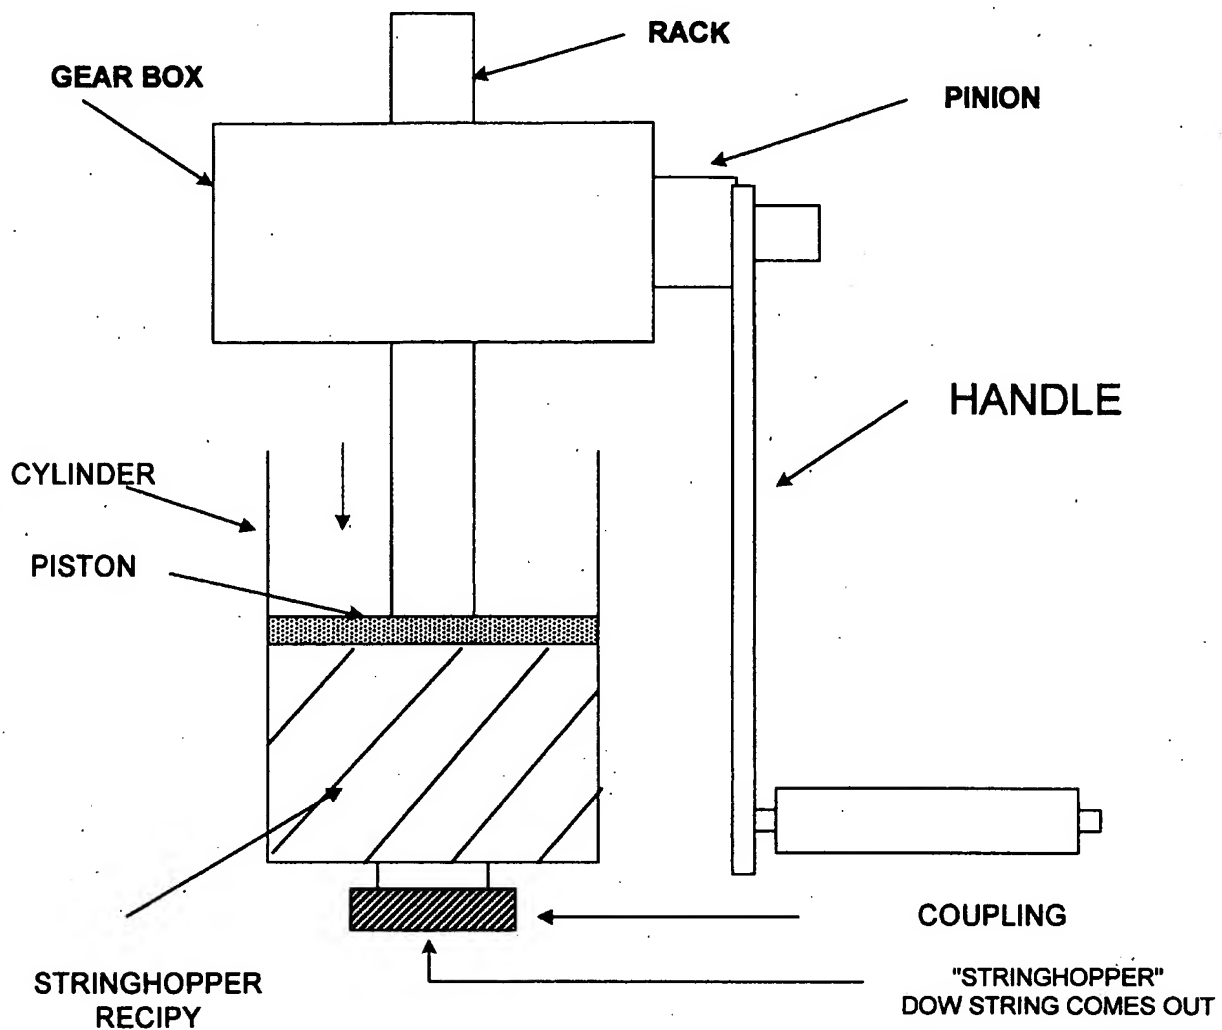Fig. 5

- 1 ROTATING THE HANDLE BY HUMAN HANDLE PINION AND GEAR SYSTEMS PUSHES THE PISTON DOWNWARD AND GIVES PRESSURE TO "STRING HOPPER" INGREDIENCE.
- 2 "STRING HOPPER" INGREDIENCE PASS THROUGH SMALL HOLES TO MAKE STRINGS.
- 3 SOME TRADITIONAL SWEETS ALSO CAN BE MADE FROM DIFFERENT SHAPES INSIDE COUPLING
- 4 GEARS AND , GEAR BOX MAY CHANGE DEPENDING ON CYLINDER SIZE

PAT_05 Date:- 07 - 01 - 2000 Page:- 5 of 11

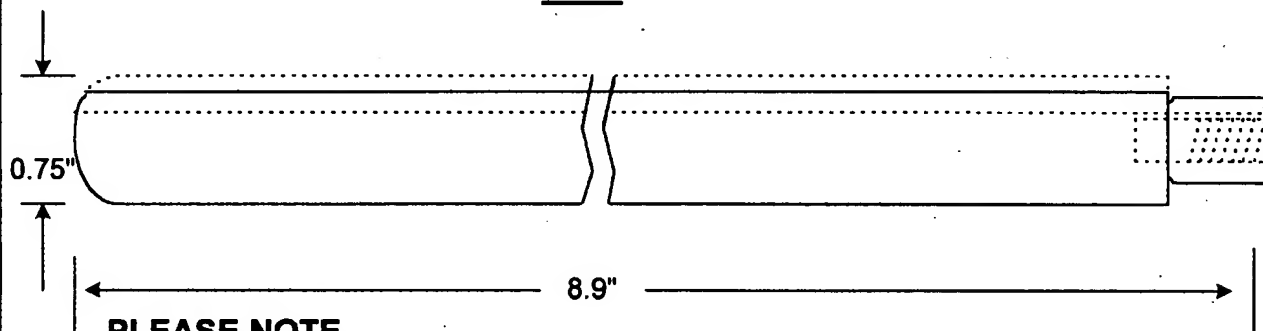
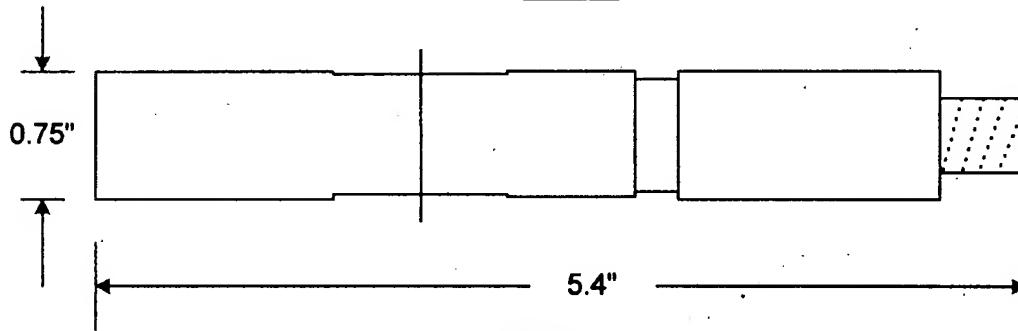
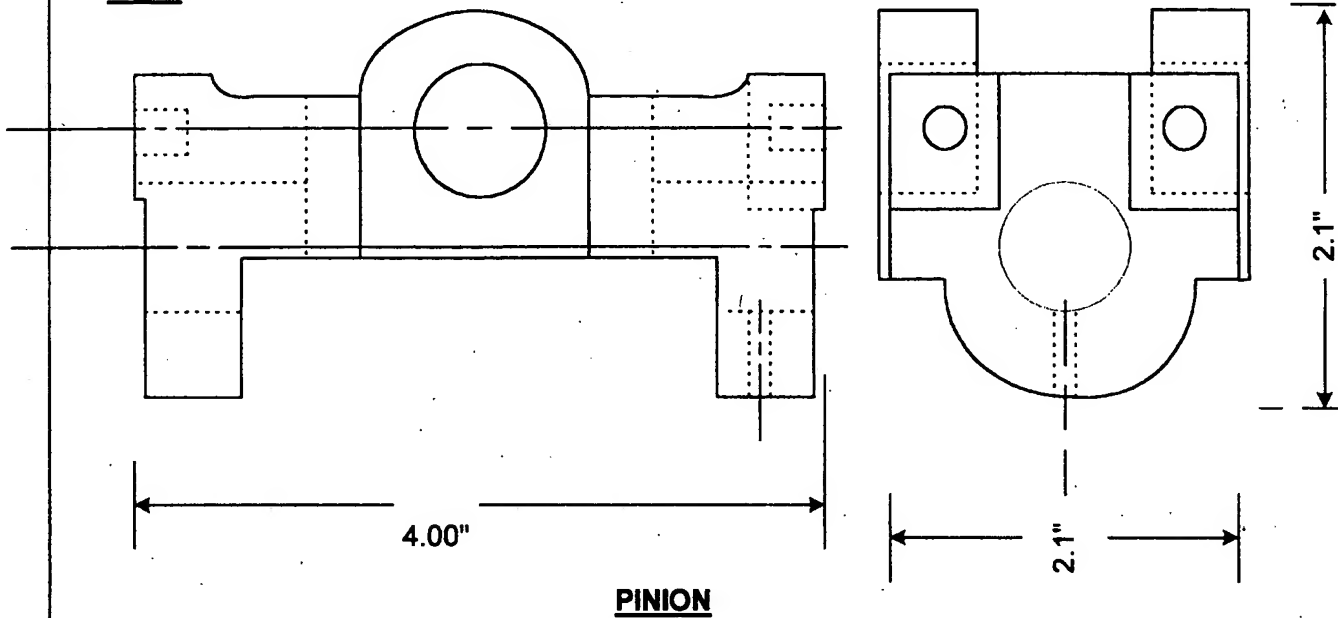
System in general

Selvadurai Srimohanarajah P.Eng.

TYPE 1 GEAR SYSTEM**GEAR BOX****Fig. 6**

TOP VIEW

SIDE VIEW


**PLEASE NOTE**

These Specifications can be changed slightly depending on cylinder size.

PAT_06 Date:- 07 - 01 - 2000 Page:- 6 of 11

Type 1 Gear System

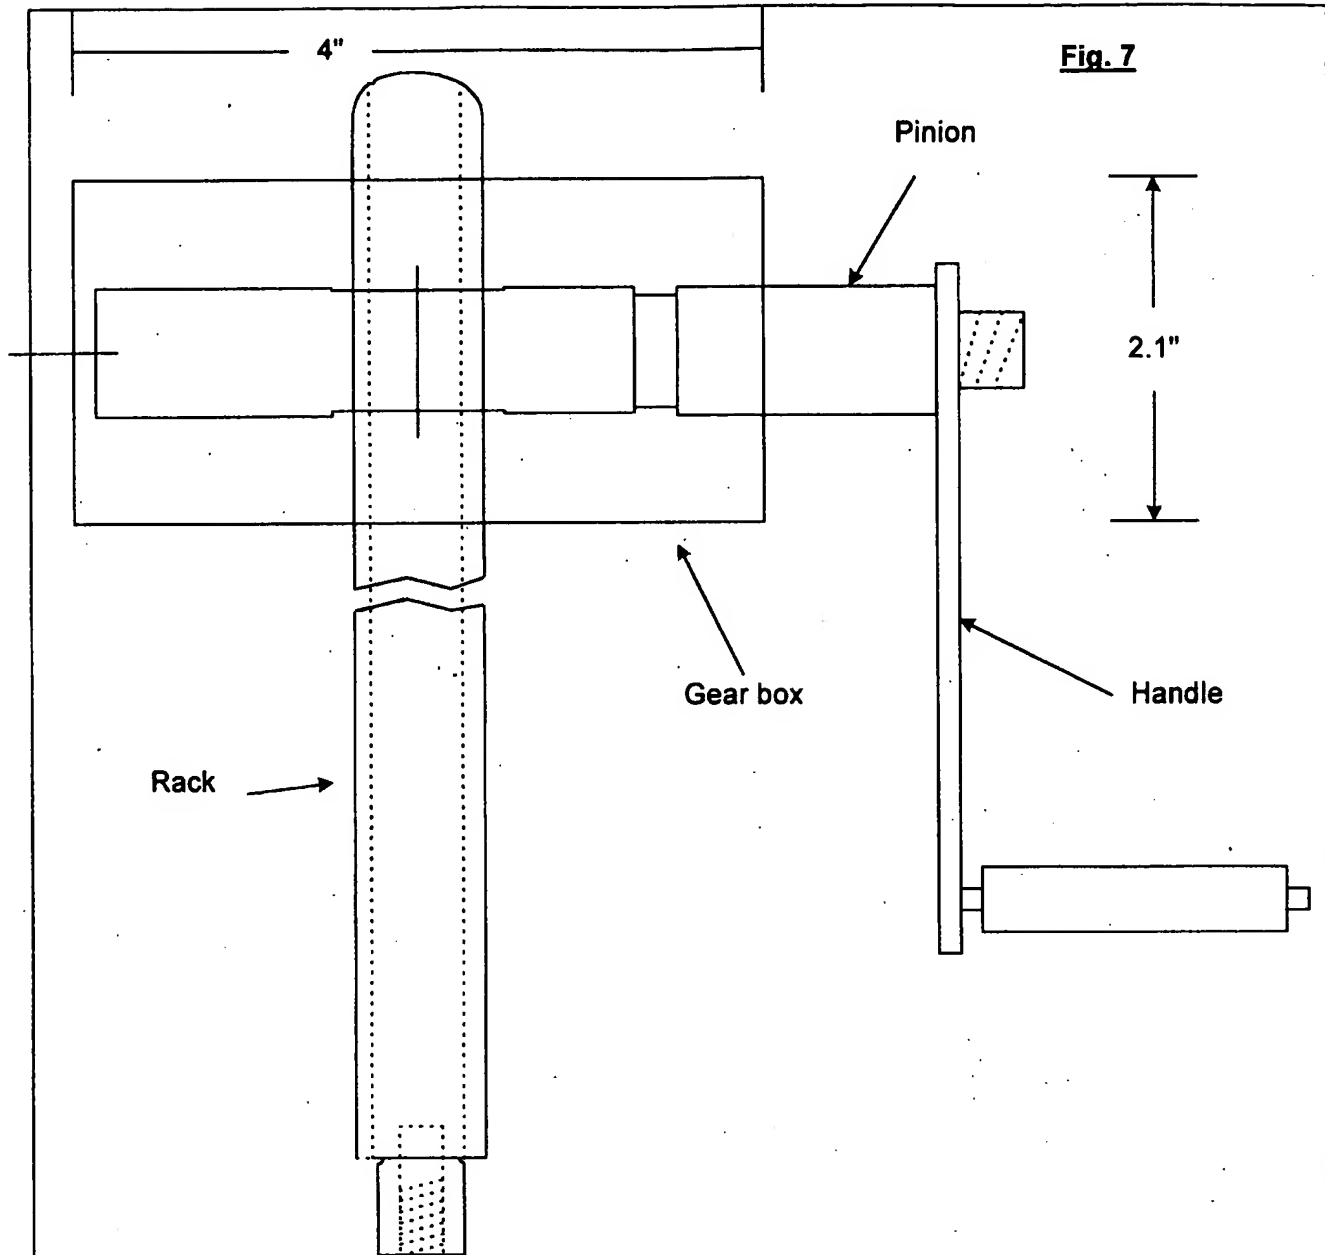Selvadurai Srimohanarajah P.Eng.



- 1: Handle rotates pinion
- 2 Pinion drives the rack up and down.

PAT_07 Date:- 07 - 01 - 2000 Page:- 7 of 11

Mechanics of Type 1 Gear System

Selvadurai Srimohanarajah P.Eng.

Fig. 8**TYPE 2 GEAR BOX**

Side view

1.25"

4"

Rear view of type 2 gear box

5"

PLEASE NOTE

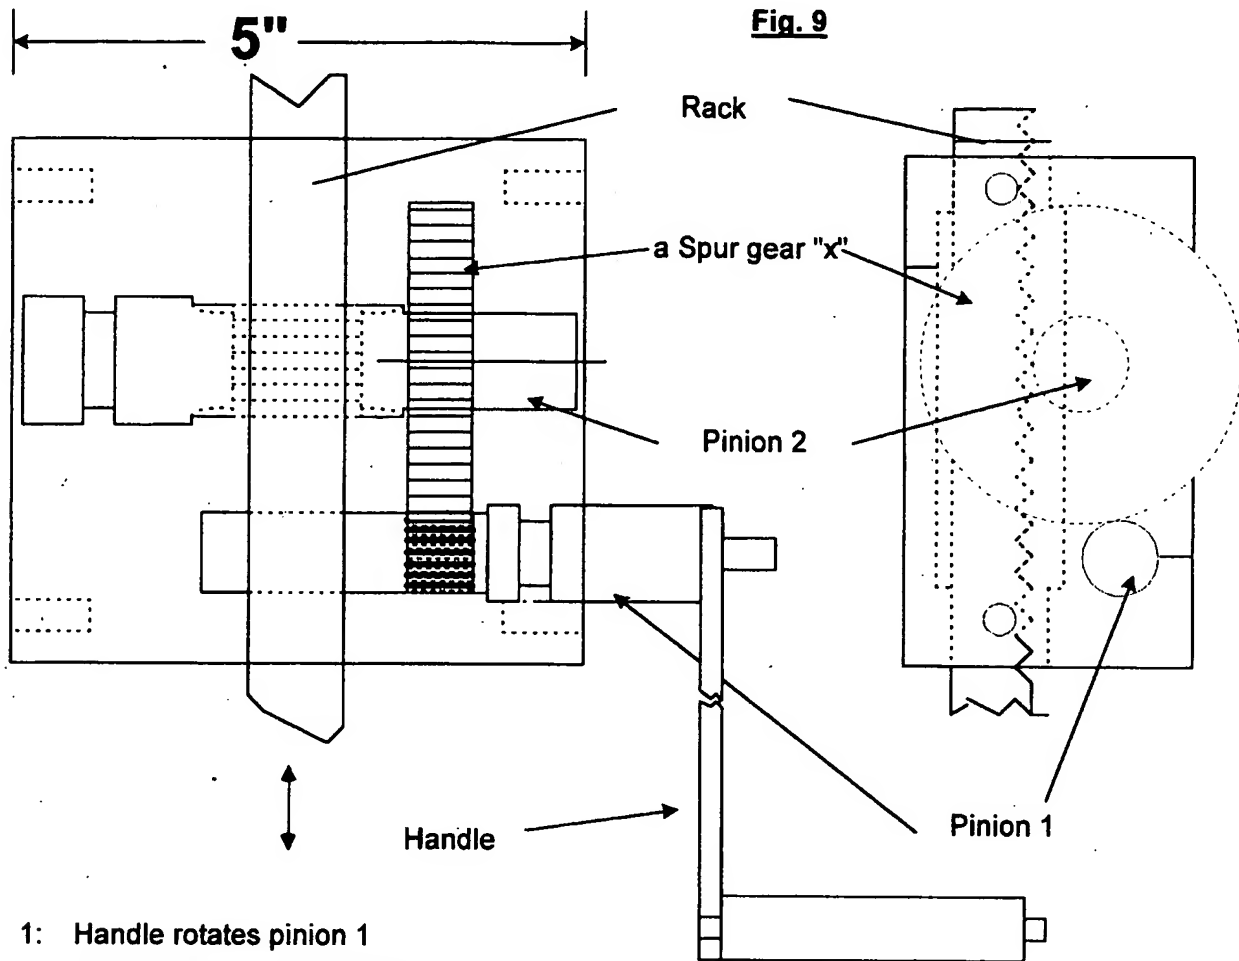
In type 2 additional pinion and gear have been used to reduce the required force to drive the rack.
gear box size may change depending on cylinder size used in the system.

Approximate size is given.


PAT_08 Date:- 07 - 01 - 2000 Page:- 8 of 11

Type 2 Gear Box

Selvadurai Srimohanarajah P.Eng.



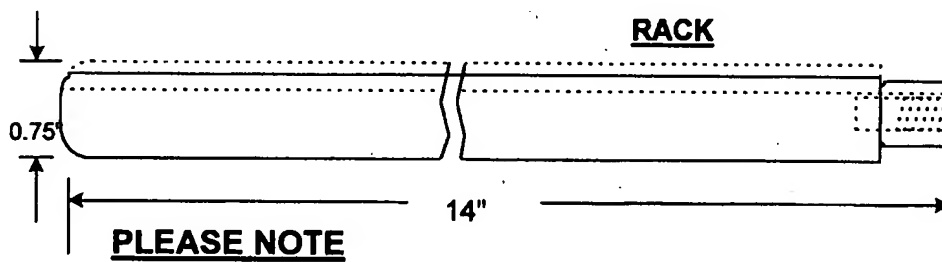- 1: Handle rotates pinion 1
- 2 pinion1 rotates spur gear "x"
- 3 Spur gear "x" and pinion 2 are connected in the middle
- 4 Therefore when spur gear "x" rotate pinion 2 will rotate.
- 5 Pinion 2 drives the rack up and down.



These Specifications can be changed slightly depending on cylinder size.


PAT_09 Date:- 07 - 01 - 2000 Page:- 9 of 11

Mechanics of Type 2 Gear System

Selvadurai Srimohanarajah P.Eng.

Fig. 10

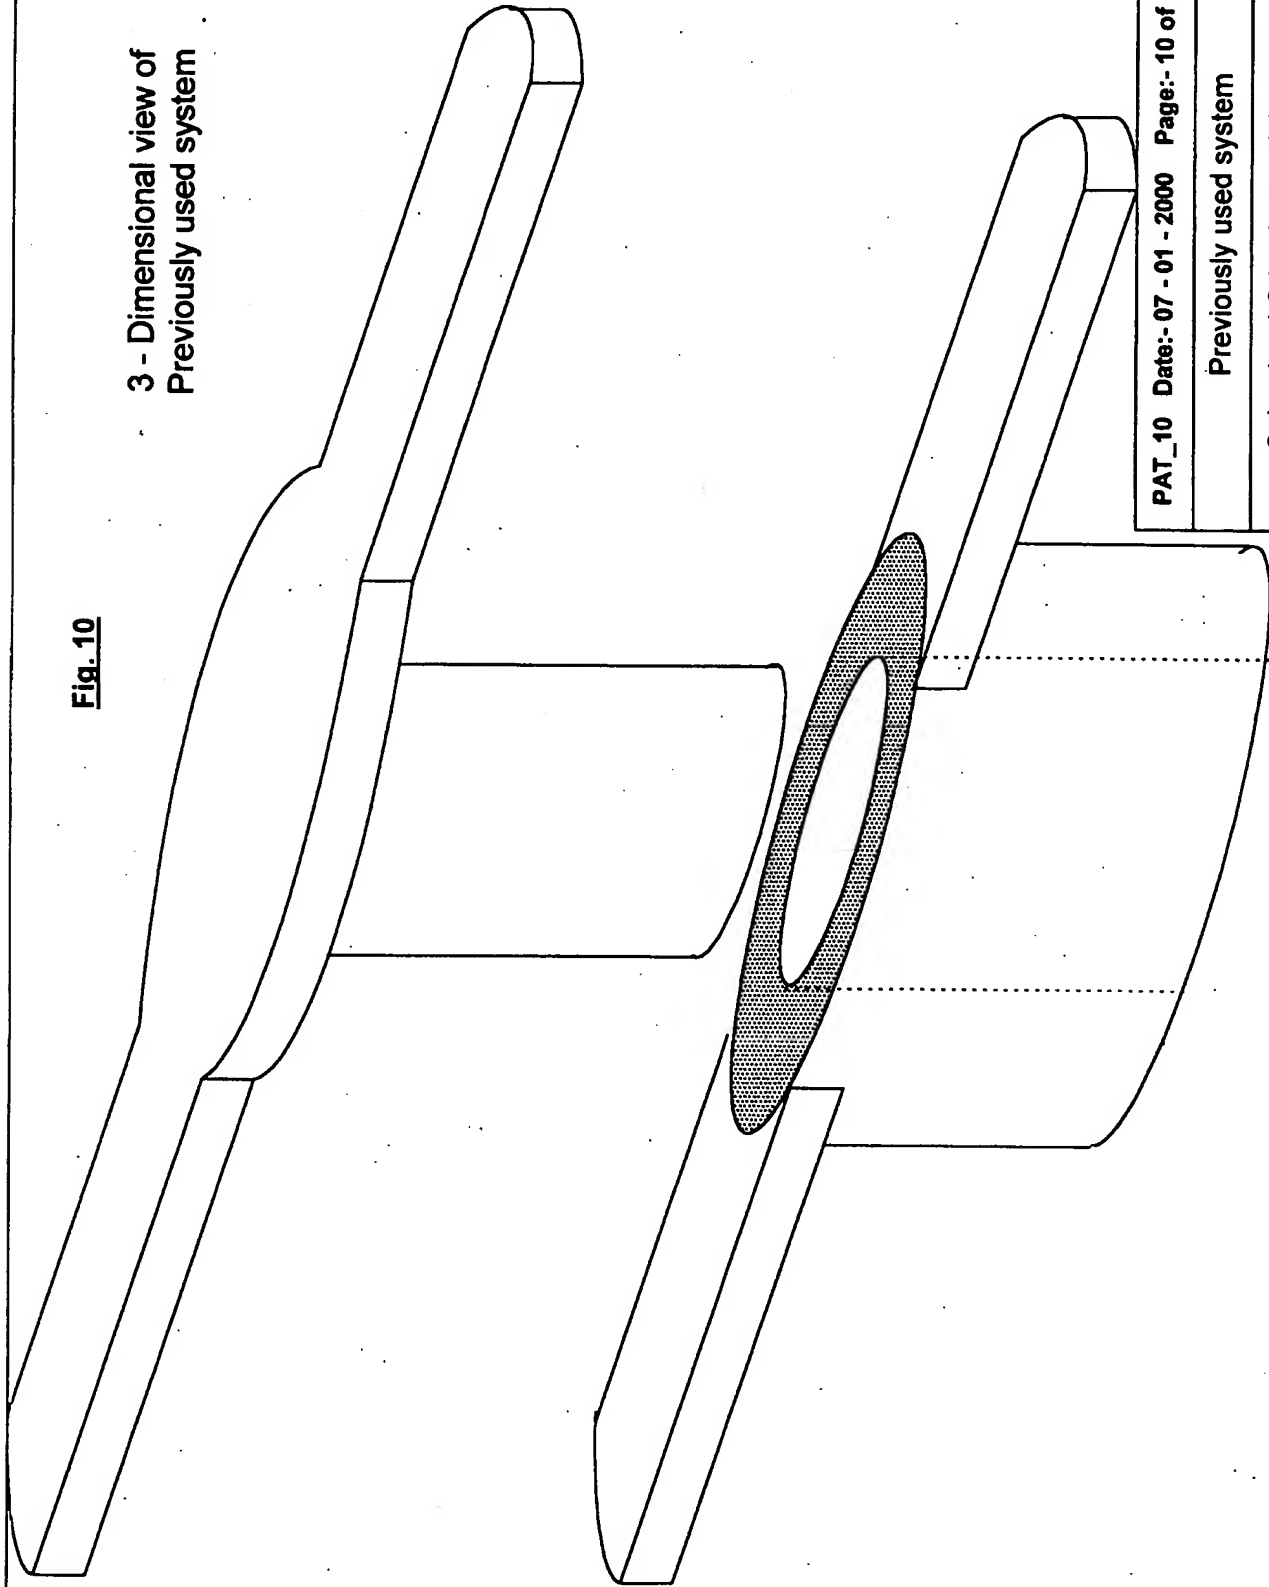
3 - Dimensional view of
Previously used system



PAT_10 Date:- 07 - 01 - 2000 Page:- 10 of 11

Previously used system

Selvadurai Srimohanarajah P.Eng.

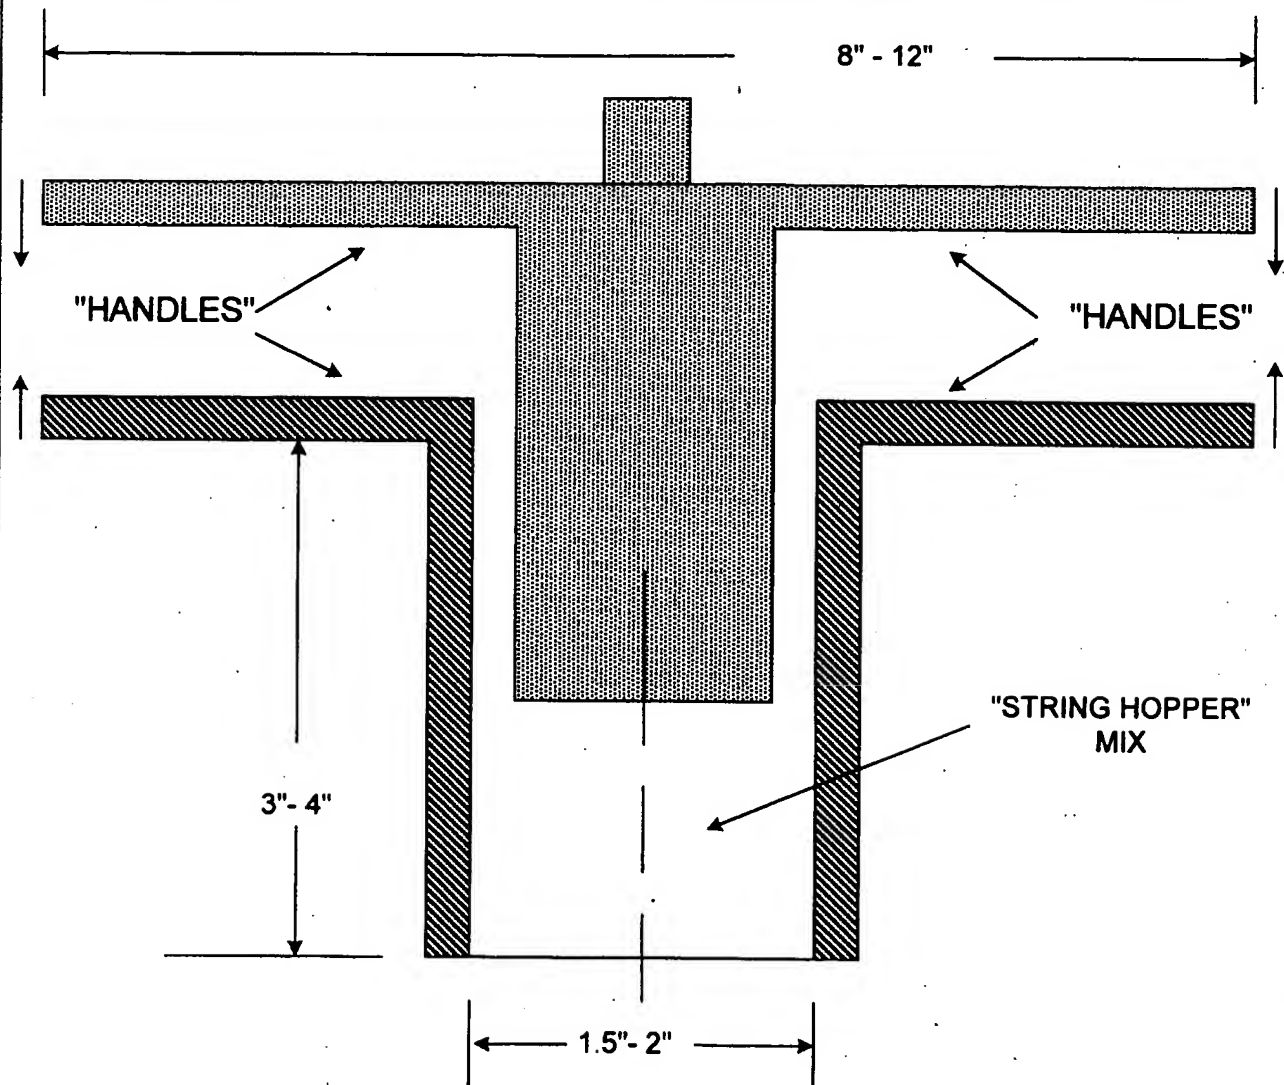Fig. 11**CROSS SECTION OF PREVIOUSLY USED SYSTEMS**

Handles are squeezed by hands to push the piston downwards

"STRING HOPPER" STRINGS COME OUT FROM THE BOTTOM.

PAT_11 Date:- 07 - 01 - 2000 Page:- 11 of 11

Cross Section of Previously used system

Selvadurai Srimohanarajah P.Eng.